




FRONT

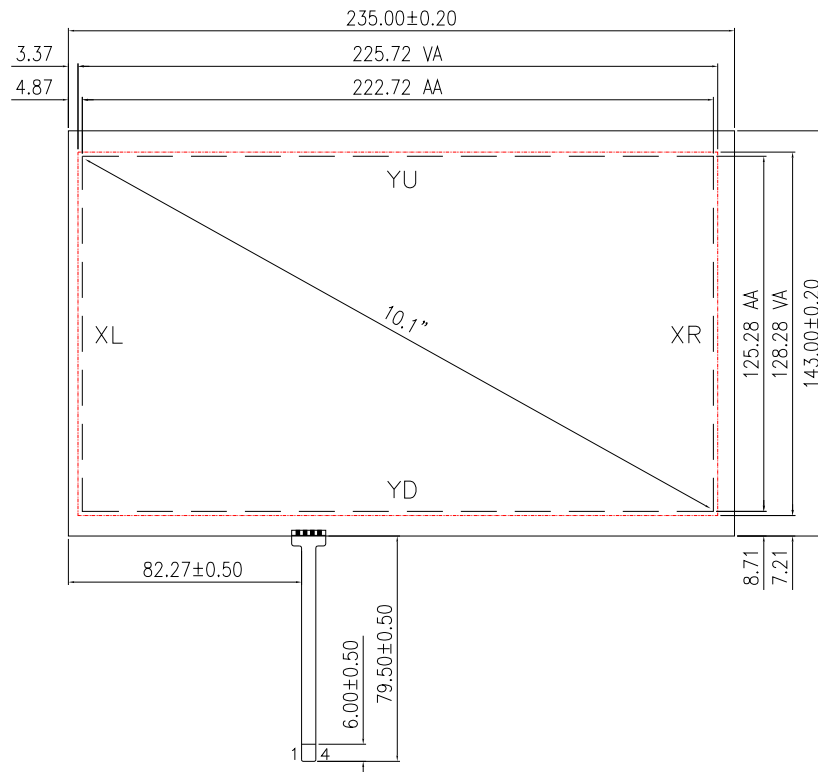

SIDE VIEW

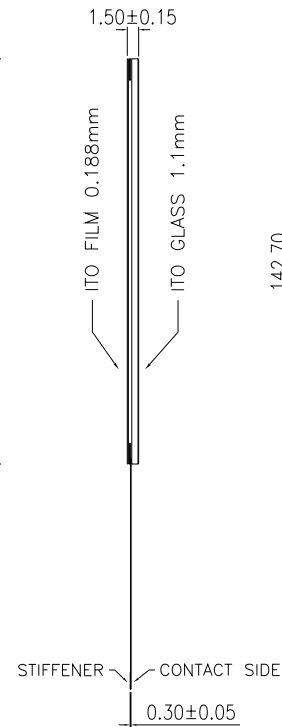


REAR

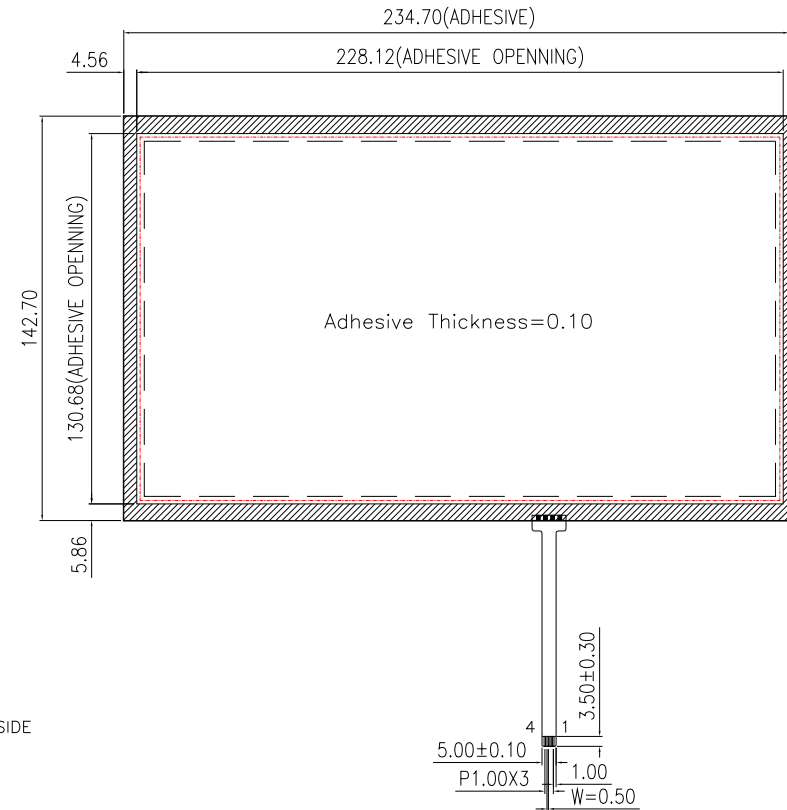

SPECIFICATION

- Structure: Film + Glass + FPC
Product thickness: 1.50±0.15mm
ITO glass: 400Ω/□ 1.1mm
ITO Film: 0.188mm(Anti-glare)
- Surface hardness: ≥3H
- Linearity: ≤1.5%
- Light transmission: ≥78%
- Chattering time: ≤10 msec
- Insulation resistance: ≤DC 25V 20MΩ
- Load upon operation: ≤100g
- Hitting durability: Hit ≥1,000,000 times
- Sliding durability: Shuttle ≥100,000 times
- Operation temp.: -20~+70℃, ≤90%RH
- Storage temp.: -30~+80℃, ≤90%RH
- Unspecified tolerance: ±0.5mm



PIN	SYMBOL
1	XL
2	YD
3	XR
4	YU

SCALE: 1 : 1 NOT TO SCALE		LAUREL ELECTRONICS CO., LTD.			
PAGE: 1 OF 1					
GENERAL TOL. : 0.5mm		UNIT: mm			
APPROVALS		DATE		MODEL NUMBER : RXA-101002-01	
APP:	MYchan	2014-09-15			
CHK:	Amor11	2014-09-15			
DWN:	Amor11	2014-09-15			
				CUSTOMER P/N : DATE: 2014-09-15	